



WHEN PROTECTION MEANS EVERYTHING.

HEIMAN FIRE EQUIPMENT THUNDERSTORM RM SLIDE IN UNIT



The **HEIMAN THUNDERSTORM SLIDE IN UNIT** is built for the rigors of the fire service with the highest quality components to maximize the integrity, durability, and life of the unit.


standard base price

\$11,695⁰⁰

shipping & delivery charge not included

pictured with additional features and options

STANDARD FEATURES

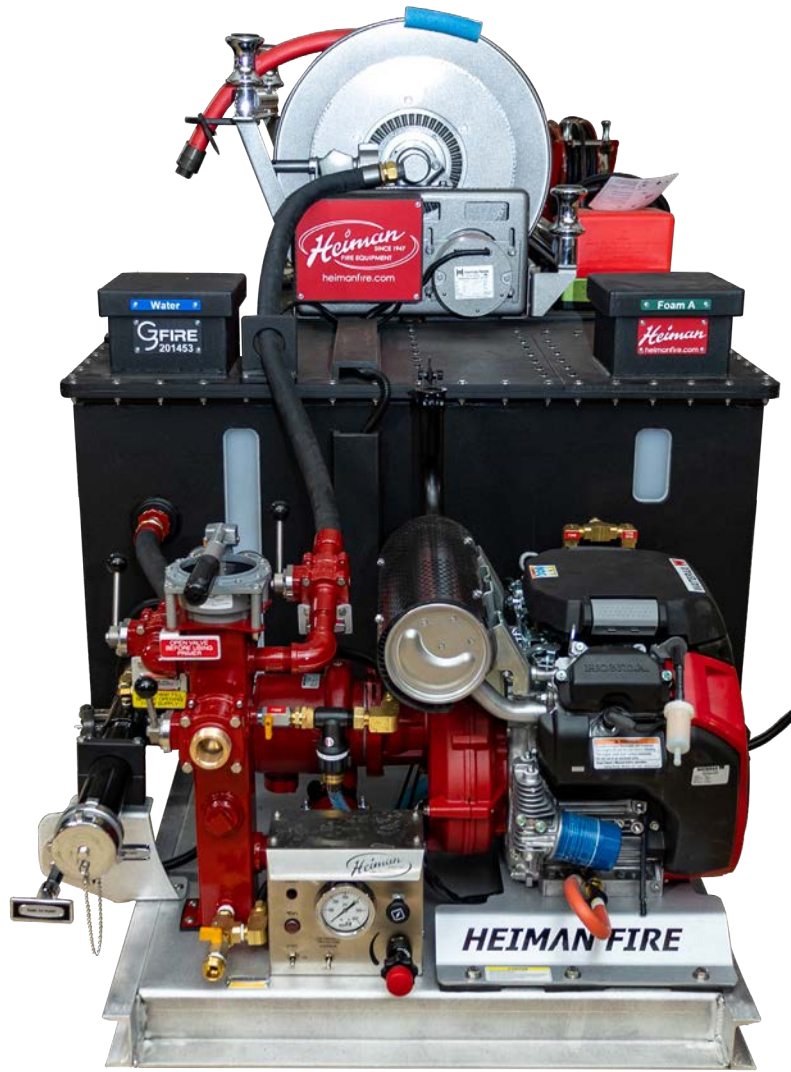

*pictured with some additional options and upgrades
*foam cell optional

- 24 HP Honda engine
- Booster reel, 1" with manual rewind
- 100' 1" booster hose
- 3 piece Elkhart valves with NH thread and ball control handles
- Tank to pump line with valve
 - High Pressure: 2" valve
 - High Volume: 2.5" valve
- 3 gal fuel tank with G3 Fire copoly mounting bracket
- Push/Pull control rod for tank to pump
- Stainless steel manifold
- Expandable discharge manifold with garden hose discharge/drain
 - High pressure model: (1) 1.5" gate valve
 - High volume model: 2.5" x (2) 1.5" gated wye
- Liquid filled gauge on discharge manifold
- 2 1/2" inlet with cap
- 1" tank fill line
- Heavy duty Guzzler hand primer with metal top
- One year warranty on the unit


DIMENSIONS

94" L x 48" W

250 gallon: 52" H	400 gallon: 66" H
300 gallon: 56" H	500 gallon: 74" H




Completely enclosed control panel with on/off start, low pressure protection override, vernier throttle, choke, liquid filled gauge, low oil light, & light shield with LED light



"HOT SWAP"
Field replaceable pump end technology



Weather proof electrical box & high pressure flexline plumbing with stainless steel couplings



Elkhart valves with ball control handles on a painted stainless steel manifold



Powder-coated pump base



Push button electric rewind system



3 gal fuel tank with copoly mounting bracket



- Removable top with sleek stainless steel bolts
- Clearly labeled & color coded foam and water fill towers with strainer

Choice of **PUMPS**

STANDARD HIGH-PRESSURE PUMP


- 4-Stage Hotshot Pump Standard
- Honda engine
- Rotary & mechanical seals
- Centrifugal pump
- Sealed ball bearings
- Brass wear ring
- Stainless steel shaft
- Belt driven speed increaser for lower rpm's and higher pressure

HIGH VOLUME PUMP

- Aluminum alloy pump casing
- Bronze impeller
- Stainless steel shaft
- Mechanical shaft seal

REPLACE YOUR ENTIRE PUMP IN MINUTES!

The Thunderstorm Slide in Unit now comes plumbed ready for our exclusive "hot swap" quick change pump technology allowing users to quickly and easily field replace the Hot Shot 4 pump with minimal tools, because sometimes things happen. Purchase our optional pump end replacement kit and never be without a pump in the field.



Quick-release clamp & pump end

KIT INCLUDES

- Hot Shot 4 or Hellcat X2 pump end with quick-release clamp & 2 grooved bolt-on coupling clamps
- (1) 8" adjustable wrench
- (1) 7/16" wrench
- (1) 11/16" wrench

Release the clamp, use the wrenches to remove the bolt-on couplings, and then replace pump end with new one.

HIGH PRESSURE/MID RANGE "HOT SWAP" FIELD REPLACEABLE PUMPS

4-STAGE 4087-100032 MAX PRESSURE: 440 PSI MAX FLOW: 106 GPM	MID RANGE 4087-100067 MAX PRESSURE: 200 PSI MAX FLOW: 300 GPM
430 psi @ 10 gpm	290 gpm @ 10 psi
415 psi @ 20 gpm	275 gpm @ 50 psi
350 psi @ 65 gpm	215 gpm @ 100 psi
250 psi @ 94 gpm	112 gpm @ 150 psi
150 psi @ 105 gpm	50 gpm @ 175 psi

ADDITIONAL OPTIONAL PUMPS & PERFORMANCE


2-STAGE 3266-HHP24-H	HALE 3266-HAL30024H	DARLEY 3266-DAR24H
325 psi @ 35 gpm	380 gpm @ 25 psi	390 gpm @ 25 psi
295 psi @ 50 gpm	320 gpm @ 50 psi	300 gpm @ 70 psi
200 psi @ 90 gpm	240 gpm @ 75 psi	180 gpm @ 120 psi
150 psi @ 120 gpm	150 gpm @ 100 psi	95 gpm @ 150 psi

Standard **TANK** features

Engineered to withstand the rigors of the fire service, G3 Fire® MAGNITUDE copolymer polypropylene is UV stabilized with 10x the impact strength of standard polypropylene even through wide temperature ranges.

- 250 gallon, lightweight & corrosion resistant G3 Fire® MAGNITUDE copolymer polypropylene tank with limited lifetime warranty
- Full NFPA baffling
- Removable top for cleaning & service
- Built-in water sight gauge
- An internal sump designed for maximum water usage

ADDITIONAL INSTALLED OPTIONS & ACCESSORIES



Push button electric rewind system
+ \$550⁰⁰



Scotty foam system
+ \$1100⁰⁰



copolymer polypropylene hose tray
+ \$350⁰⁰



water level indicator
+ \$595⁰⁰



2.5" inlet w/cap and optional valve
+ \$475⁰⁰



Silvex Plus or Phos Chek foam
+ \$115⁰⁰/pail



Bubble Cup nozzle
1" 10/24 gpm
+ \$370⁰⁰



Tip 1.5" 20/60 gpm
+ \$89⁰⁰



LED work light
+ \$175⁰⁰

HIGH PRESSURE/MEDIUM VOLUME PUMP

- 4087-100032..... HONDA HIGH PRESSURE 4 STAGE..... [STANDARD] \$ _____
- 3266-HHP24-H..... HONDA HIGH PRESSURE [ADD \$370] \$ _____

HIGH VOLUME/MEDIUM PRESSURE PUMP

- 4087-100067 HONDA MID-RANGE 2-STAGE [NO CHARGE] \$ _____
- 3266-HAL30024H..... HONDA HIGH VOLUME (HALE)..... [ADD \$160] \$ _____
- 3266-DAR24H..... HONDA HIGH VOLUME (DARLEY) [ADD \$270] \$ _____
- OTHER: PLEASE SPECIFY _____ [ADD _____] \$ _____

- 4000-T-H200.....200 GALLON COPOLY TANK _____ foam cell..... [DEDUCT \$100] \$ _____
- 4000-T-H250.....250 GALLON COPOLY TANK _____ foam cell..... [STANDARD] \$ _____
- 4000-T-H300.....300 GALLON COPOLY TANK _____ foam cell..... [ADD \$450] \$ _____
- 4000-T-H400.....400 GALLON COPOLY TANK _____ foam cell..... [ADD \$1000] \$ _____
- 4000-T-H500.....500 GALLON COPOLY TANK _____ foam cell..... [ADD \$1900] \$ _____
- 4000-CUSTOM TANK..... [ADD \$ _____] \$ _____
- 4000-CUSTOM SKID..... [ADD \$ _____] \$ _____

- 2904-EF32-23-24.....In place of standard manual reel..... [ADD \$550] \$ _____
- 2904-EF4038.....In place of standard manual reel..... [ADD \$175] \$ _____
- 2904-FH3.....ROLLER & SPOOL ASSEMBLY ON REEL: []top []bottom.. [ADD \$235 ea] \$ _____
- 2930-575.....ADDITIONAL 50' OF 1" BOOSTER HOSE..... [ADD \$260] \$ _____
- SECOND REEL.....Electric Rewind, on top of tank, includes plumbing (add hose) [ADD \$1400] \$ _____
- 1111-32.....NO HOSE REEL..... [DEDUCT \$390] \$ _____
- 1111-33.....NO STANDARD 100' BOOSTER HOSE [DEDUCT \$400] \$ _____
- 2118-BLCHY.....Lightweight, easy handling lead-in booster hose, 12.5' [ADD \$83] \$ _____

- 1242-S106-1600FOAM PRO SYSTEM, INSTALLED *with integrated 10 gal foam cell*..... [ADD \$6,100] \$ _____
- 3306-4072-H/cell.....SCOTTY FOAM SYSTEM, INSTALLED *with integrated 10 gal foam cell*... [ADD \$1,100] \$ _____
- 3306-4074-H/pickup.....SCOTTY FOAM SYSTEM, INSTALLED
with pick up tube and threaded cap for department supplied foam pails [ADD \$550] \$ _____

- 1430-08825001-FPMN ...GATED INLET, ELKHART [ADD \$475] \$ _____
- 1430-08815101-MPMN ..Additional 1.5" DISCHARGE W/ VALVE [ADD \$355] \$ _____
- 4000-CPPHT..... COPOLY HOSE THROUGH for 1.5" hose [] PS [] DS..... [ADD \$350] \$ _____
- 2803-ITL-4L.....HALE/CLASS 1 WATER LEVEL LIGHT GAUGE [ADD \$595] \$ _____
- 1111-INSTALLINSTALL MASTER SWITCH, UNIT, AND WIRE..... [ADD \$425] \$ _____
- 4109-H71030401LED WORK LIGHT [ADD \$175] \$ _____
- 4087-250238.....12 VOLT ELECTRIC PISTON PRIMER INSTALLED [ADD \$795] \$ _____
- 4087-600006.....PUMP END REPLACEMENT KIT (4-STAGE) HOT SHOT 4 [ADD \$1925] \$ _____
- 4087-600007.....PUMP END REPLACEMENT KIT (MIDRANGE) HELLCAT X2..... [ADD \$1925] \$ _____
- UNDER SKID STORAGE COMPARTMENT W/DOOR [ADD \$1300] \$ _____
- CROSSLAY PLUMBED..... [ADD \$1100] \$ _____
- _____ [ADD \$ _____] \$ _____
- _____ [ADD \$ _____] \$ _____
- _____ [ADD \$ _____] \$ _____
- _____ [ADD \$ _____] \$ _____
- _____ [ADD \$ _____] \$ _____
- _____ [ADD \$ _____] \$ _____

TOTAL \$ _____

Remarks: _____

Date: _____ Salesperson: _____

Fire Dept: _____

Contact: _____

Phone #: _____

Email: _____

CUSTOMER REQUIRED TO HAVE FORKLIFT AVAILABLE FOR UNLOADING. *FOR UNITS OVER 7', EXTENDED FORKLIFT REQUIRED

Call your salesman for more options & pricing